




# TACKY TILE

loose lay adhesive free

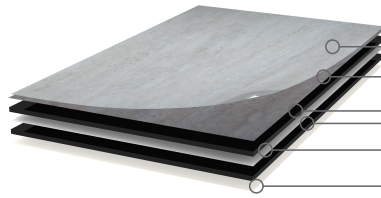

Top PU Finishing Wearlayer  
0,55 mm thickness  
Design film  
Pure PVC backing  
Fiberglass stabilizer  
Reusable adhesive

Premium design flooring with unique characteristics.

TACKY TILE	SUPER MATTE
Dimensions EN 427	1219 x 229 x 3mm
Impact Sound Reduction EN 140	5 dB
Emboss / Surface	Deep Wood Emboss Super matte
Class EN 649	33
Weight EN 430	5,3 kg/m <sup>2</sup>
Dimensional Stability EN 434	Approved
Fire Resistance EN 131501	Bfl - S1
Chemical Resistance EN 423	Class 0 - Good
Abrasion Wear EN 425	Pass Castor Chair (W)
Slippery Resistance EN 13893	DS (R9 very secure)
Indentation EN 433	Max 0,03mm
Anti-static Resistance EN 1815	Rubber sole: +5,9kv   PVC sole: +3,4kv
Toxicity EN 71	NoToxic
Resistance to Fading ISO 105 B02	6/8 depending on design
AbBB/Dibt low VOC (U-Sign)	Certified
Thermal Resistance EN 12524	0,014 m <sup>2</sup> K/W
Underfloor Heating	Approved 28°C



AUTHENTIC LOOK



LOW VOC



RECYCLABLE



COMFORTABLE



ANTI-SLIPPERY



RESISTANT



GLUELESS INSTALLATION



QUICK INSTALLATION



PHTHALATE FREE



EASY TO INSTALL



ANTI-STATIC



OK RADIANT HEATING



SOUND REDUCTION



WATER PROOF



REUSABLE