




AQUA CLIC

water proof flooring

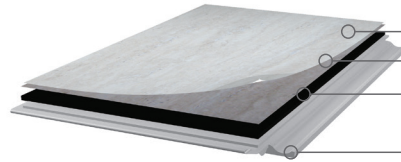

Embossed wearlayer
with PU finishing
Design film
Pure PVC backing
100% waterproof board
with Uniclic® profile

Premium design flooring with unique characteristics.

AQUA CLIC	ECO	HOME	OAK PLANK/ ORIGINALS	SUPER MATTE OAK / SUPER MATTE COTTAGE OAK	MOONLIGHT / FANTASY / METALLIC	XL SLATE	SIGNATURE SENSES / ROYAL SENSES / RUSTIC SENSES
Dimensions EN 427	900x 305 x 4,8mm	900x 305 x 5,1mm	1205 x 215 x 5,1mm	1205 x 215 x 5,1mm	620 x 445 x 5,1mm	1205 x 445 x 5,1mm	1205 x 215 x 5,1mm
Emboss / Surface	Regular Wood Emboss Semi-matte	Regular Wood Emboss Semi-matte	Regular Wood Emboss Semi-matte	Deep Wood Emboss Super-matte	Regular Stone Emboss Semi-matte	Regular Slate Semi-matte	Registered Emboss Semi-matte
Class EN 649	32	32	32	32	32	32	42
Weight EN 430	7 kg/m ²						
Impact Sound Reduction EN 140	7 dB						
Dimensional Stability EN 434	0,10%						
Fire Resistance EN 13501	Bfl - S1						
Chemical Resistance EN 423	Class 0 - Good						
Abrasion Wear EN 425	Pass Castor Chair (W)						
Slippery Resistance EN 13893	DS (R9 very secure)						
Indentation EN 433	Max 0,03mm						
Anti-static Resistance EN 1815	< 2kV						
Toxicity EN 71	Non Toxic						
Resistance to Fading ISO 105 B02	6/8 depending on design						
Underfloor Heating	Approved 27°C						
AbBB/Dibt low VOC (U-Sign)	Certified						
Thermal Resistance EN 12524	0,032 m ² K/W						
Wet Areas	Approved						



**AUTHENTIC
LOOK**



LOW VOC



RECYCLABLE



COMFORTABLE



ANTI-SLIPPERY



RESISTANT



**PHTHALATE
FREE**



**EASY
TO INSTALL**



ANTI-STATIC



**OK RADIANT
HEATING**



**SOUND
REDUCTION**



**WATER
PROOF**



EU Patent 0843 783 B1 - U.S. Patent No. 6,906,488