




SLIM FIT
design floating floor

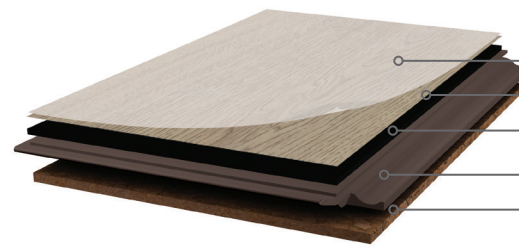

Embossed Wearlayer
with PU finishing
Design film
Pure PVC backing
Aqua stop fiberboard
Cork granulate underlayment

**Water resistant
floating floors
to fit all spaces.**

SLIMFIT	SLIMFIT
Dimensions EN 427	1200 x 210 mm
Thickness EN 428	7 mm
Impact Sound Reduction EN 140	17 db
Emboss/Surface	Regular Wood Emboss Semi-matte
Classification EN 16511	Class 32
Fire Performance EN 13501	Cfl-s1
Anti-sliding properties EN 13893	Class DS
Formaldehyde emission EN 717-1	Class E1
Content of PCP CEN/TR 14823	Not to declare
Dimensional Stability after exposure to heat EN ISO 23999:2012	-0.1%
Abrasion Resistance EN 15468	Class 33
Static Indentation EN ISO 24343	0,04 mm
Resistance against impact (big ball) EN 13329	no visible change
Determination of the effect of a castor chair EN 425	no visible change
Determination of the effect of a furniture leg EN 424	no visible change
Microscratch resistance EN 16094	MSR-A2 / MSR-B1
Resistance against staining according to EN 438-2:2016	Acetone: grade 5 Coffee: grade 5 NaOH: grade 4 H2O2: grade 5 Shoe polish: grade 5
Locking strength ISO 24334 : 2006 - short side joints - long side joints	4.9 kN/m 1.7 kN/m
Underfloor Heating	Approved 27°C

