




F **FLOATING**
design floating floor

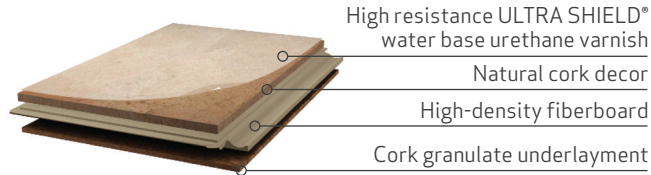

Comfortable living
is not a luxury.

| COLLECTIONS | EXCLUSIVE | ETERNAL |
|---|-------------------|---------------------------|
| Dimensions | 900 x 300 x 11 mm | 900 x 300 x 10 mm |
| Weight EN 430 | | 8 Kg/m ² |
| Level of use Domestic | | 23 |
| Level of use Commercial | | 32 |
| Thickness EN 428 | | 10mm - 11mm |
| Dimensions EN 427 | | 900 x 300 mm |
| Dimensional Stability EN434 | | 0.1% |
| Castor chair EN 425 | | no visible change |
| Effect of a furniture leg EN 424 | | no visible change |
| Resistance against impact (big ball) EN 13329, Annex F | | 1800 mm |
| Microscratch resistance DIN EN 16094 | | MSR-A1 / MSR-B3 |
| Abrasion resistance prEN15468:2013, Annex A (Falling-Sand method) | | 5200 revolutions |
| Residual Indentation EN ISO 24343-1 | | 0.13 mm |
| Fire Resistance DIN EN 13501 | | Cfl -s1 |
| Anti-sliding properties EN13893 | | DS |
| Anti-slip property DIN 51130:2014 | | R9 |
| Formaldehyde emission EN 717-1 | | E1 |
| Electrostatic behaviour EN 1815 | | Antistatic Floor Covering |
| Thermal Resistance EN 12667 | | 0.1 (m ² K)/W |
| Impact Sound Reduction EN 140 | | 17 dB - 19dB |
| Impact Insulation Class IIC according ASTM E 492-09 / ASTM E 989-89 | | 55 dB |
| Resistance to changing climate IHD-W-424 | | No visible change |
| Locking strength ISO 24334 | | |
| Short side joints | | 4.8 kN/m |
| Long side joints | | 4.2 kN/m |



ANTI-SLIPPERY



RESISTANT



EASY TO REPAIR



OK RADIANT HEATING



RECYCLABLE



ECO-FRIENDLY



ANTI-ALLERGY



PHTHALATE FREE

