




**AQUA CLIC**  
water proof flooring

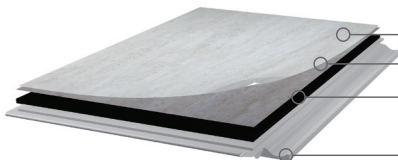

Embossed wearlayer  
with PU finishing  
Design film  
Pure PVC backing  
100% waterproof board  
with Uniclic® profile

**Premium design flooring  
with unique  
characteristics.**

| AQUA CLIC                        | HOME                                 | OAK PLANK /<br>GRANGE / ORIGINALS    | SUPER MATTE                        | METALLIC /<br>STONE                   | XL SLATE                       | ROYAL SENSES /<br>RUSTIC SENSES    |
|----------------------------------|--------------------------------------|--------------------------------------|------------------------------------|---------------------------------------|--------------------------------|------------------------------------|
| Dimensions EN 427                | 900x 305 x 5,1mm                     | 1205 x 215 x 5,1mm                   | 1205 x 215 x 5,1mm                 | 620 x 445 x 5,1mm                     | 1205 x 445 x 5,1mm             | 1205 x 215 x 5,1mm                 |
| Emboss / Surface                 | Regular<br>Wood Emboss<br>Semi-matte | Regular<br>Wood Emboss<br>Semi-matte | Deep Wood<br>Emboss<br>Super-matte | Regular<br>Stone Emboss<br>Semi-matte | Regular<br>Slate<br>Semi-matte | Registered<br>Emboss<br>Semi-matte |
| Class EN 649                     | 32                                   | 32                                   | 32                                 | 32                                    | 32                             | 42                                 |
| Weight EN 430                    | 7 kg/m <sup>2</sup>                  |                                      |                                    |                                       |                                |                                    |
| Impact Sound Reduction EN 140    | 7 dB                                 |                                      |                                    |                                       |                                |                                    |
| Dimensional Stability EN 434     | 0,10%                                |                                      |                                    |                                       |                                |                                    |
| Fire Resistance EN 13501         | Bfl - S1                             |                                      |                                    |                                       |                                |                                    |
| Chemical Resistance EN 423       | Class 0 - Good                       |                                      |                                    |                                       |                                |                                    |
| Abrasion Wear EN 425             | Pass Castor Chair (W)                |                                      |                                    |                                       |                                |                                    |
| Slippery Resistance EN 13893     | DS (R9 very secure)                  |                                      |                                    |                                       |                                |                                    |
| Indentation EN 433               | Max 0,03mm                           |                                      |                                    |                                       |                                |                                    |
| Anti-static Resistance EN 1815   | < 2kV                                |                                      |                                    |                                       |                                |                                    |
| Toxicity EN 71                   | Non Toxic                            |                                      |                                    |                                       |                                |                                    |
| Resistance to Fading ISO 105 B02 | 6/8 depending on design              |                                      |                                    |                                       |                                |                                    |
| Underfloor Heating               | Approved 27°C                        |                                      |                                    |                                       |                                |                                    |
| AbBB/Dibt low VOC (U-Sign)       | Certified                            |                                      |                                    |                                       |                                |                                    |
| Thermal Resistance EN 12524      | 0,032 m <sup>2</sup> K/W             |                                      |                                    |                                       |                                |                                    |
| Wet Areas                        | Approved                             |                                      |                                    |                                       |                                |                                    |



**AUTHENTIC  
LOOK**



**LOW VOC**



**RECYCLABLE**



**COMFORTABLE**



**ANTI-SLIPPERY**



**RESISTANT**



**PHTHALATE  
FREE**



**EASY  
TO INSTALL**



**ANTI-STATIC**



**OK RADIANT  
HEATING**



**SOUND  
REDUCTION**



**WATER  
PROOF**



EU Patent 0863 783 B1 - U.S. Patent no. 6,906,489