




FLOATING

design floating floor

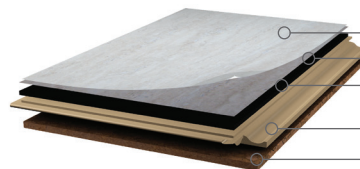

Embossed Wearlayer
with PU finishing
Design film
Pure PVC backing
High-density fiberboard
Cork granulate underlayment

Premium design flooring with unique characteristics.

FLOATING	HOME	OAK PLANK / GRANGE	SUPER MATTE	ORIGINALS	METALLIC / STONE	XL SLATE	ROYAL SENSES / RUSTIC SENSES	LUNGO
Dimensions EN 427	900x 300 x 9,8mm	1200 x 210 x 9,5mm	1200 x 210 x 10,8mm	1200 x 210 x 10,8mm	612 x 440 x 10,8mm	1200 x 440 x 10,8mm	1200 x 210 x 10,8mm	1800 x 220 x 10,8mm
Impact Sound Reduction EN 140	16 dB	15 dB	18 dB	18 dB	18 dB	18 dB	18 dB	18 dB
Emboss / Surface	Regular Wood Emboss Semi-matte	Regular Wood Emboss Semi-matte	Deep Wood Emboss Super-matte	Regular Wood Emboss Semi-matte	Regular Stone Emboss Semi-matte	Regular Slate Emboss Semi-matte	Registered Emboss Semi-matte	Regular Wood Emboss Semi-matte
Class EN 430	32	32	32	32	32	33	33	33
Weight EN 430	10 kg/m ²	10 kg/m ²	11 kg/m ²	11 kg/m ²	11 kg/m ²	11 kg/m ²	11 kg/m ²	11 kg/m ²
Dimensional Stability EN 434	0,10%							
Fire Resistance EN 131501	Bfl - S1							
Chemical Resistance EN 423	Class 0 - Good							
Abrasion Wear EN 425	Pass Castor Chair (W)							
Slippery Resistance EN 13893	DS (R9 very secure)							
Indentation EN 433	Max 0,03mm							
Anti-static Resistance EN 1815	< 2kV							
Toxicity EN 71	Non Toxic							
Resistance to Fading ISO 105 B02	6/8 depending on design							
Thermal Resistance EN 12524	0,088 m ² K/W							
AbBB/Dibt low VOC (U-Sign)	Certified							
Underfloor Heating	Approved 27°C							



**AUTHENTIC
LOOK**



LOW VOC



RECYCLABLE



COMFORTABLE



ANTI-SLIPPERY



RESISTANT



**PHTHALATE
FREE**



**EASY
TO INSTALL**



ANTI-STATIC



**OK RADIANT
HEATING**



**SOUND
REDUCTION**

UNICLIC®
EU Patent 0843 763 B1 - US Patent nr. 6,006,046

