




FLOATING

eco friendly
floating floor

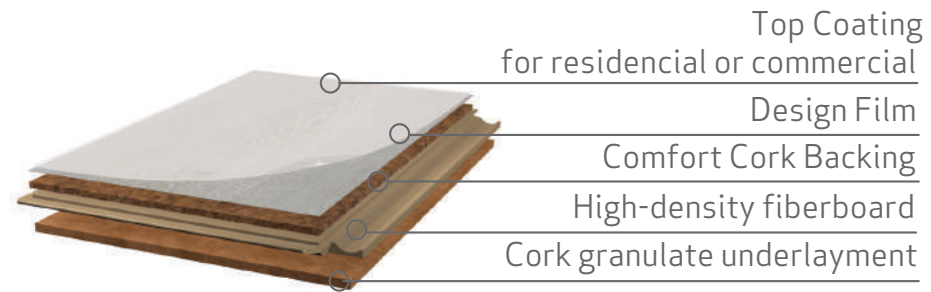

Unique design options for cork flooring.

FLOATING	DESIGN	
Dimensions EN 427	1200 x 210 / 612 x 440 mm	
Thickness EN 428	10,5 mm	
Squareness EN 427	< 0,3 mm	
Straightness EN 427	< 0,2 mm	
Opening between panels EN 14085	-	
Residual Indentation EN 433	< 0,25 mm	
Dimensional Stability EN 434	< 4 %	
Fire classification EN 13501-1	Cfl-S1	
Formaldehyde emission EN 717-1/2	E1	
Determination of the Slippery resistance	Class DS	
Impact Noise Reduction ISO 140-8	17 dB	
Anti-static Resistance EN 1815	< 2kV	
Abrasion Wear EN 425	Pass Castor Chair (W)	
Thermal resistance EN 12667:2001	0.0982 M2 k/W	
Resistance against impact (big ball) EN 13329, annex F	No visible change	
Locking Strength ISO 24334:2006	short side 4.8 kN/m	long side 4.2 kN/m

